



CEILING SPEAKER Installation Manual




1. Specifications, Functional parts, and Parameters


Electrical	
Max Power	45W
Rated Power	30W
Power Tapping(100V)	3.75W/7.5W/15W/30W
Power Tapping(70V)	1.8W/3.75W/7.5W/15W/30W
Constant resistance(8Ω)	30W
Sensitivity(1m/1W)	88dB
S.P.L(1m/30W)	103dB
Frequency Response	130Hz ~ 17kHz
Dispersion Angle (1kHz / -6dB)	150°
Rated Input Voltage	100V/70V
Rated Impedance(100V)	2.7kΩ/1.3kΩ/667Ω/333Ω
Rated Impedance(70V)	2.7kΩ/1.3kΩ/667Ω/333Ω/167Ω
Connection	European terminal
Mechanical	
Dimensions	Φ267 x 162mm
Hole For Mounting	Φ240mm
Material/Back barrel	ABS/Iron
Grille	Powder Coated Iron Mesh
Product Weight	3.34kg
Color(Grille)	White(RAL9016)
Color(Back barrel)	Black (RAL9004)
Speaker size	Bass: 6.5" Treble: 1"
Environmental	
Operating Temperature	-25℃ to +55℃
Storage Temperature	-40℃ to +70℃
Relative Humidity	<95%

2. Three View

Unit: mm

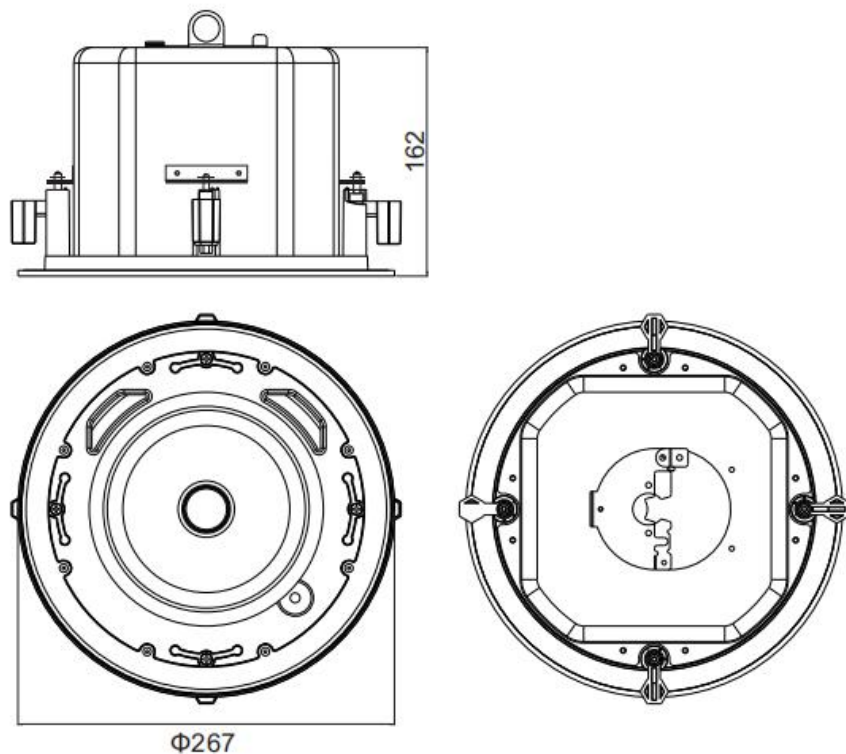


3. Circuit Diagram

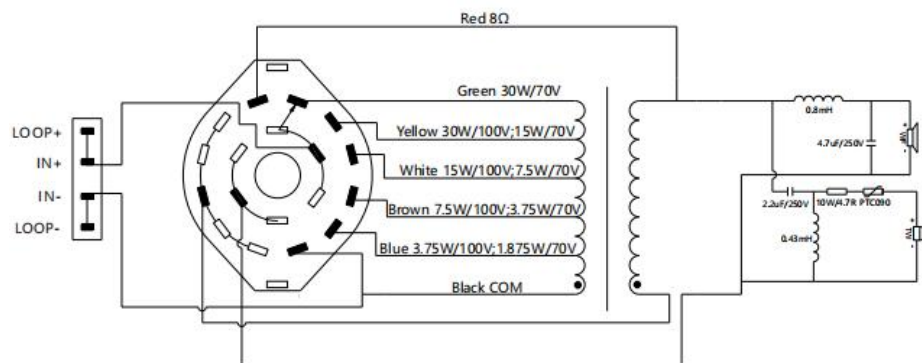

4. Installation Instructions

- (1) Make a hole at 240 mm diameter in the ceiling.
- (2) Fix the safety rope to the steel bars or bolts near the horn opening to prevent the horn from falling.
- (3) Take down the grille from the loudspeaker.
- (4) Connect the audio signal cable, install the product on the ceiling according to the pre-opened holes, and tighten the screws to Fix the tab with the ceiling.
- (5) Re-install the grille.

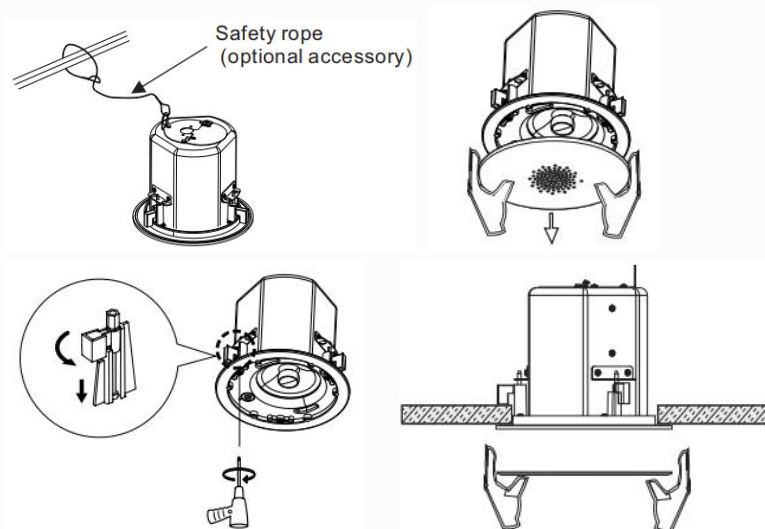

5. Packing list

- (1) Ceiling speaker 1pcs
- (2) Installation Manual 1pcs
- (3) Warranty Card and Certificate 1pcs



Wechat

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice



V1. 0B240122