


LAWN SPEAKER Installation Manual







1. Summary


(1)Lawn speaker This product is designed for use in outdoor environment, with the advantages of rain, moisture, corrosion, cold and high temperature resistance, impact resistance, unique shape, etc., widely used in factories, villa areas, squares, parks, residential areas, schools, tourist areas, etc...

(2)Lawn speaker, can be directly connected to 100V line output. The 100V transformer on the NAC-2604 lawn speaker, the lead connector of the primary winding can be used for power Settings. The user can choose the power.

2. Specifications, Functional parts, and Parameters

Electricity	Speaker unit	5 "PP subwoofer x 3 2 "treble x2
	Max power	40W
	PHC	30W
	Sensitivity (1kHz,1 m)	95dB±3 dB
	Effective frequency response (-10dB)	120-15kHz
	Rated voltage	100V
	Input interface	3-core cable
	Terminal color	Black, White, Green
Product	Product size	ф 370mm x395mm
	Net weight	4.2kg
	Installation	Screw holder
Material	Shell	Red FRP
Environment	Operation	-25°C to+55°C
	Storage humidity	-40°C to+70°C
	RH	< 95%

3. Circuit diagram

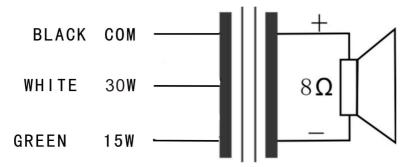



Wiring instructions:


Connect the power amplifier output COM to the black line, and connect the power amplifier 100V output to the required cable.

For example:

Using 30W rated power: the power amplifier COM is connected to the black line, and the power amplifier 100V is connected to the white line.

Using 15W rated power: the power amplifier COM is connected to the black line, and the power amplifier 100V is connected to the green line.

4. Installation Diagram

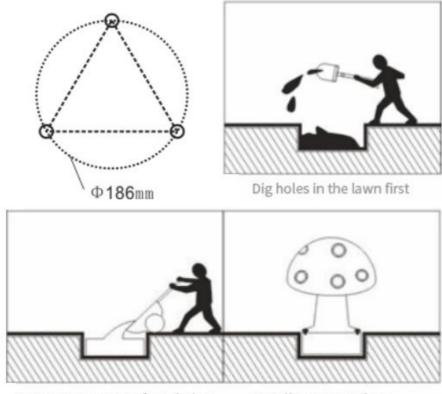

Pour 200# concrete foundation

Install Lawn Speakers use * 8 mm screw

5. Fault maintenance

Fault phenomenon	Fault reason & exclude
The sound is small even no sound	Check if the wiring of wall mounted speaker is correct, tight and no shorting. With the power selection, please confirm if the power switch has been adjusted to the right position.
The sound quality is not good and there is noise.	Check if the input signal source of amplifier and input transmission joint is correct. In addition, the wall mounted speaker should be tightly fixed, otherwise, the resonance will be generated which can result in bad sound quality.

Product Implementation Standard

Q/JSPTX 003-2024

6. Packing list

- (1) Installation Instructions 1 pcs
- (2) Warranty card and Certificate 1 pcs
- (3) Lawn Speaker 1pcs



