



LCS-2353D

Floor Standing Microphone

LCS-2353D Floor Standing Microphone is a condenser super-cardioid microphone with a wide frequency response. Featuring a stand-mounted floor design and high-quality sound pickup performance, it is specifically designed for audio recording in speeches and stage performances. It offers narrow-angle super-directional performance and long-distance sound pickup. The screw-adjustable microphone head design allows flexible positioning of the pickup head at any angle.

Phantom Power

Super-Cardioid

MAIN FEATURES

▲ Ergonomics Design

- Elegant and refined structural design with a strong modern aesthetic, conforming to ergonomic principles.
- 16mm diameter gold-plated pickup head paired with a floor-standing long pole structure; freely adjustable angle and pickup direction for precise sound capture.

▲ Audio Performance

- Extremely wide and flat frequency response, offering economical versatility across applications—from conference systems to speech sound recording.
- High-quality super-cardioid directional back-electret condenser microphone for focused audio pickup.
- Equipped with a premium windproof sponge cover to minimize unwanted plosives and wind noise during speech.

▲ Anti-Interference Capabilities

- Strong anti-RF (radio frequency) interference shielding design with an all-metal housing, delivering excellent resistance to radio frequency interference.
- Superior anti-mobile phone interference performance.

▲ Power & Connectivity

- Built-in head preamplifier and amplifier components; operates with external 24V to 52V DC phantom power.
- Easy-to-use 3-pin XLR male connector for straightforward microphone installation.

SPECIFICATION

POWER PARAMETERS

Operating Power:	DC12-52V
------------------	----------

AUDIO PARAMETERS

Frequency Range:	20-20000Hz
------------------	------------

Sensitivity:	-42dB (20mV/Pa)
--------------	-----------------

Directivity:	Super-Cardioid
--------------	----------------

Sound Pick-Up Angle:	120°
----------------------	------

Max Sound Pressure Level:	115dB
---------------------------	-------

Impedance:	2000Ω
------------	-------

SNR:	≥75dB
------	-------

MECHANICAL&ENVIRONMENT PROPERTIES

Microphone Stick Length:	125cm
--------------------------	-------

Base Diameter:	Φ24cm
----------------	-------

Weight Of Single Stick Microphone:	4.3kg
------------------------------------	-------

Floor Stand Rod Length:	60cm
-------------------------	------

Product Warranty:	2 Years
-------------------	---------

ACCESSORIES

1×Microphone

1×Microphone Stick

1×Floor Stand Base

1×Main Rod





1×XLR Cable

1×Microphone Windshield

3×Floor Stand Buckle

1×Quality Certificate & Warranty Card

INSTALLATION INSTRUCTIONS

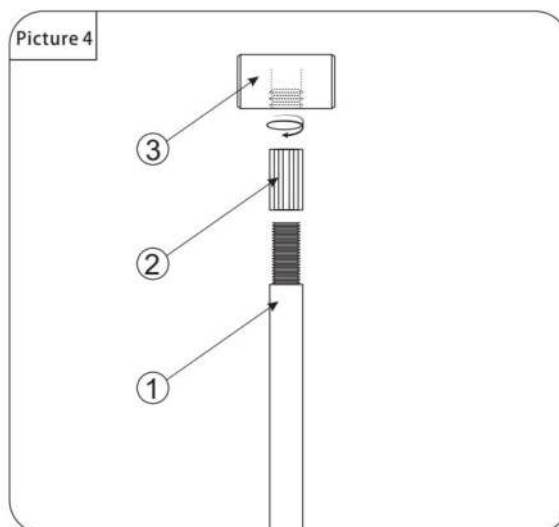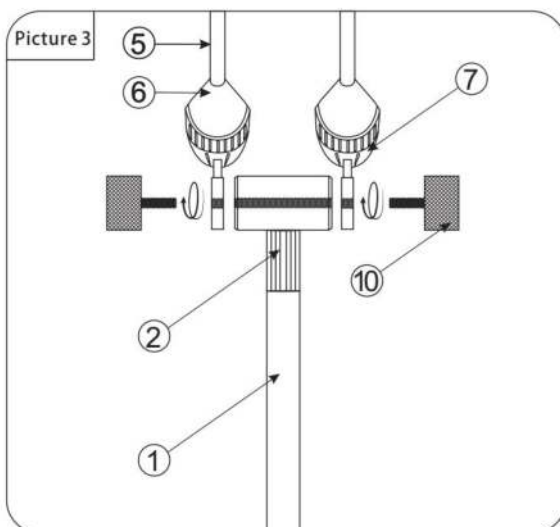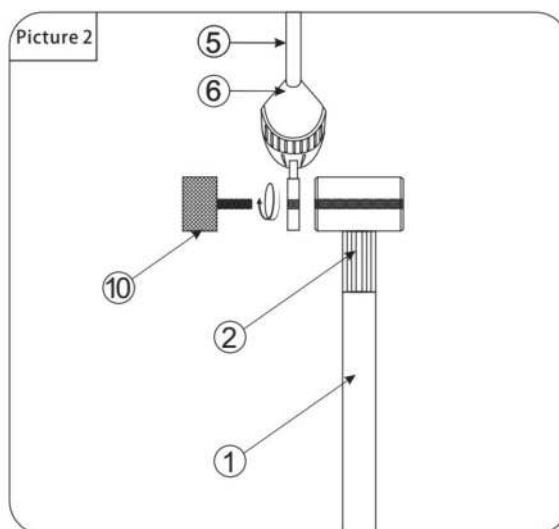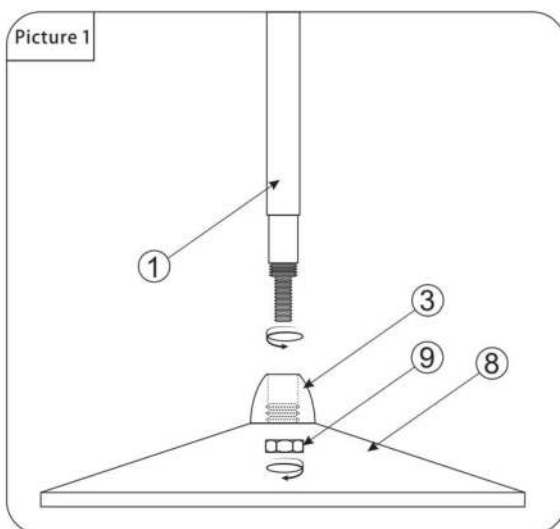

- | | | |
|--|--------------------------|---------------------------|
| 1.Main rod | 5.Microphone stick | 8.Base |
| 2.Adjusting nut | 6.Stick adjusting | 9.Nut |
| 3.Conical seat for main rod | 7.The stick fixing screw | 10.Screw to fix the stick |
| 4.Fixing screw between main rod and base | | |

Picture1: Insert the main road into the base with counter clockwise rotation, and with the screw by clockwise rotation to strengthen the connection.

Picture 2: Adjust the height of single microphone stick by fixing screw.

Picture 3: Adjust the height of double microphone sticks by fixing screw.

Picture 4: Fix the microphone direction by adjust nut.

