



LCS-5200S

Conference Control Management Software

The Conference Control Management Software supports creating, viewing, controlling and managing conference directly in the system. Support adding conference sign-in and voting . Linkage large screen display.

MAIN FEATURES

▲ Conference Management Features

- Includes check-in, voting, and decision-making management, designed for use with the main conference unit.
- Software supports starting the meeting, attendee check-in, slogan display, entering discussion, starting voting, and other operations.
- Allows inserting meeting titles during the meeting to add new topics.

▲ Display & Interface

- The main screen shows the operation page, while the split screen displays conference slogans, check-in prompts, voting, and results.
- The content displayed on the split screen can be customized, including background images and the ability to upload pictures and other elements.

▲ Device Compatibility

- Supports both wired and wireless conference speech units.

▲ Personnel & Seating Management

- Supports importing venue floor plans and customizing seating arrangements. Personnel data (such as name, gender, device type, seat number, and voting rights) can be imported and exported.

▲ Voting & Display Features

- Supports options for anonymous voting, showing proposal pass rates, countdown timers, whether to automatically display the meeting logo, and customizing large-screen display content.

▲ Post-Meeting Data Processing


- Provides functionality to export and print attendee lists, agenda results, and files generated during the meeting.

SPECIFICATION

INSTALLATION ENVIRONMENT

Operating System	Windows 10、Windows 11
CPU	Intel Core i5 or above
Memory(RAM)	16GB and above
System Type	64-bit operating system
Conference Host Version	LCS-5203L or above


SOFTWARE REGISTRATION

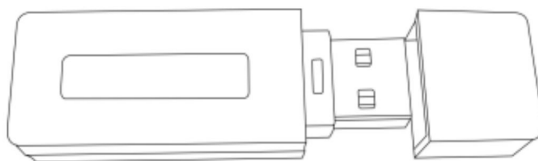

User can get authorization to use the official version software through dongle. The dongle must be inserted while running the software.

Dongle: directly insert dongle to the USB (drive-free), and then reboot the server software.


SYSTEM DIAGRAM

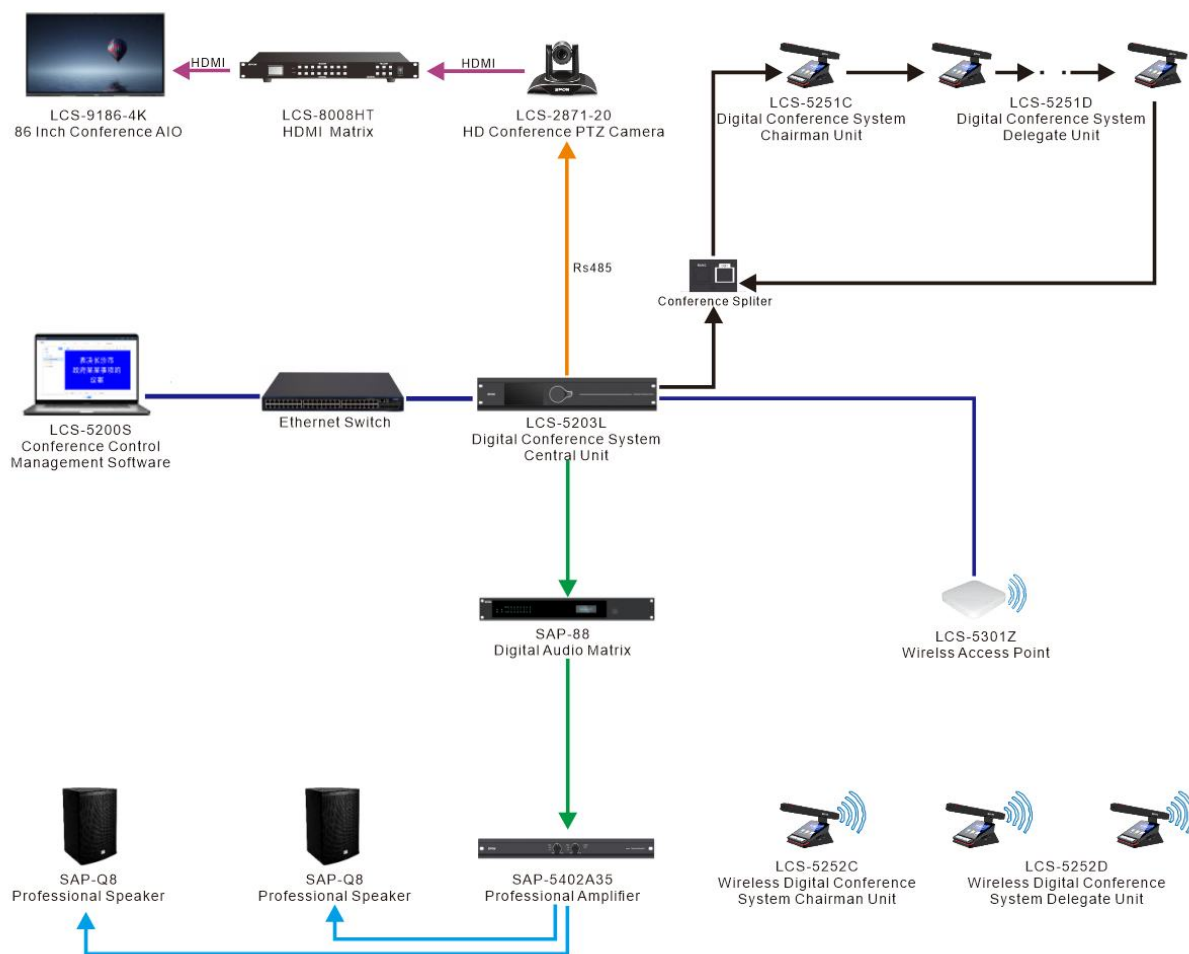

TYPICAL APPLICATION

I Application 1

The conference control management software supports the sign-in function. After the sign-in agenda begins, the conference representative unit will receive a prompt. After the sign-in is completed, the sign-in result will be displayed in the conference control management software and on the large screen.

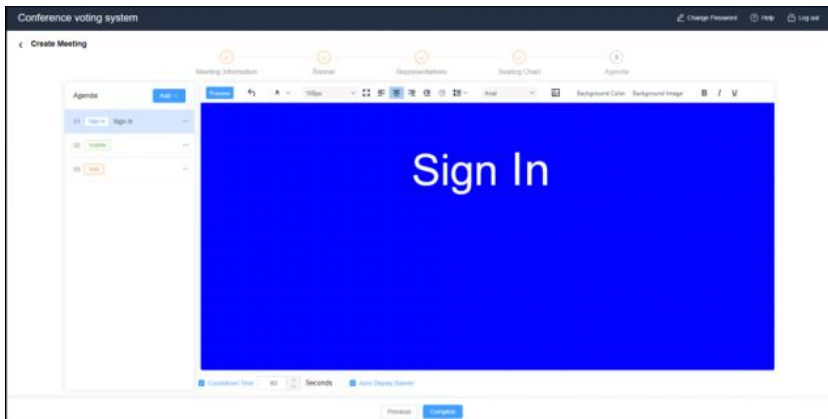

I Application 2

The conference control management software supports voting. Users can create voting topics. When voting begins, conference delegates can vote. After voting, the conference control management software and the large screen will display the voting results.

