

LCS-5252C-L

Wireless Digital Conference Chairman Unit

- Video Tracking
- 4.3" Touchscreen
- High-Fidelity Microphone
- Supports Type-C charging with charging base
- Representatives Management

CE | 4.3-Inch Touch Screen | Type-C/Magnetic charging | Voting/ Attendance | One touch Mute | 2.4-5.8G Hz

MAIN FEATURES

▲ Interactive Display

- High-Resolution Touchscreen:
4.3-inch full-color display with 480*480 resolution for an intuitive user interface.

▲ Meeting Management Tools

- Meeting Control:
Chairman unit manages meeting sign-ins, voting, and displays real-time results.
- Speaker Authorization:
Authority to approve or prohibit speech from delegate units.
- Real-Time Information Display:
Shows current speakers, seat numbers, and speaker queue.

▲ Intercom and Communication

- Directory Access:
Can access the intercom server directory for initiating IP intercom functions.
- IP Address Utilization:
Enables communication using IP addresses or directory listings.

▲ Design and Audio Quality

- Acoustic Chamber:
Microphone stem features a special design for aesthetics and sound quality.
- High-Fidelity Microphone:
Gooseneck microphone for long-distance sound capture.
- Ergonomic Base:
Meticulously designed for user comfort and style.

▲ Technical Advantages

- Digital Signal Transmission:
Offers strong resistance to interference.
- Status Indicators:
Speech status indicator light on the microphone stem and a light ring on the base.
- Wireless Connectivity:
Utilizes WiFi for seamless communication.
- Video Tracking:
Incorporates video tracking for enhanced meeting dynamics.

SPECIFICATION

POWER PARAMETERS

Power Supply:	Lithium Battery (4000mAh)
Power Consumption:	≤3W

AUDIO PARAMETERS

Audio Codec:	MP3/PCM/ADPCM
Audio Sampling Rate ,Bit Rate:	8Khz-44.1Khz,16bit,8Kbps-320kbps
SNR:	≥83dB
Frequency Response:	40Hz-18KHz

MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Display:	4.3-Inch Capacitive Touchscreen,480*480
Product Color:	Black
Shell Material:	ABS/Aluminum Alloy
Microphone:	14mm Diameter Gold-Plated Capacitive Microphone
Directional:	Supercardioid
Working Temperature:	0°C~+45°C
Working Humidity:	≤90%, No Condensation
Product Dimensions:	144×100×392 (mm)
Warranty:	2 Years

ACCESSORIES

1×Microphone Pole

1×Waterproof Cotton


1×Quick Installation Guide

1×Quality Certificate


1×Warranty Card

INTERFACE DESCRIPTION

[Front Panel]

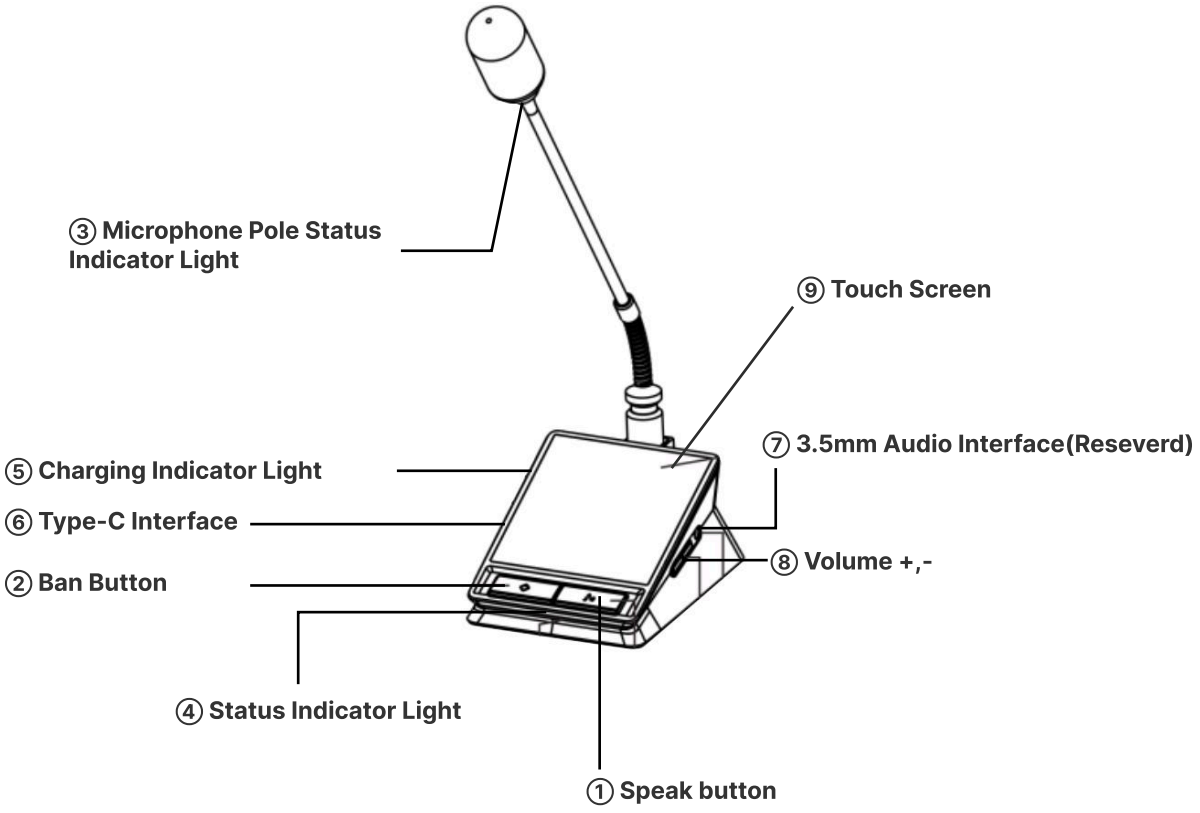


[Rear Panel]

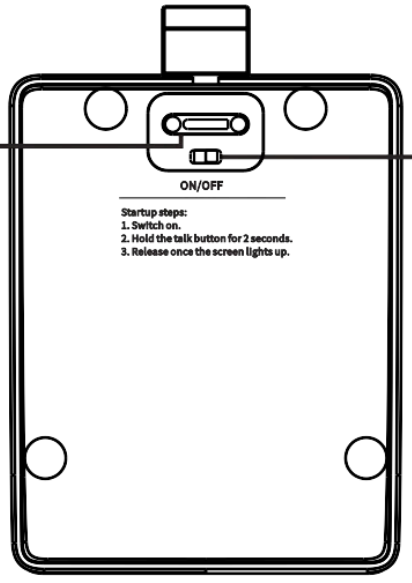


② Magnetic pedestal:
Used for charging, used with wireless charging station.

① Power Switch :
Control the power supply of the microphone. It is recommended to dial to OFF when the microphone is not in use.

CONNECTION DIAGRAM

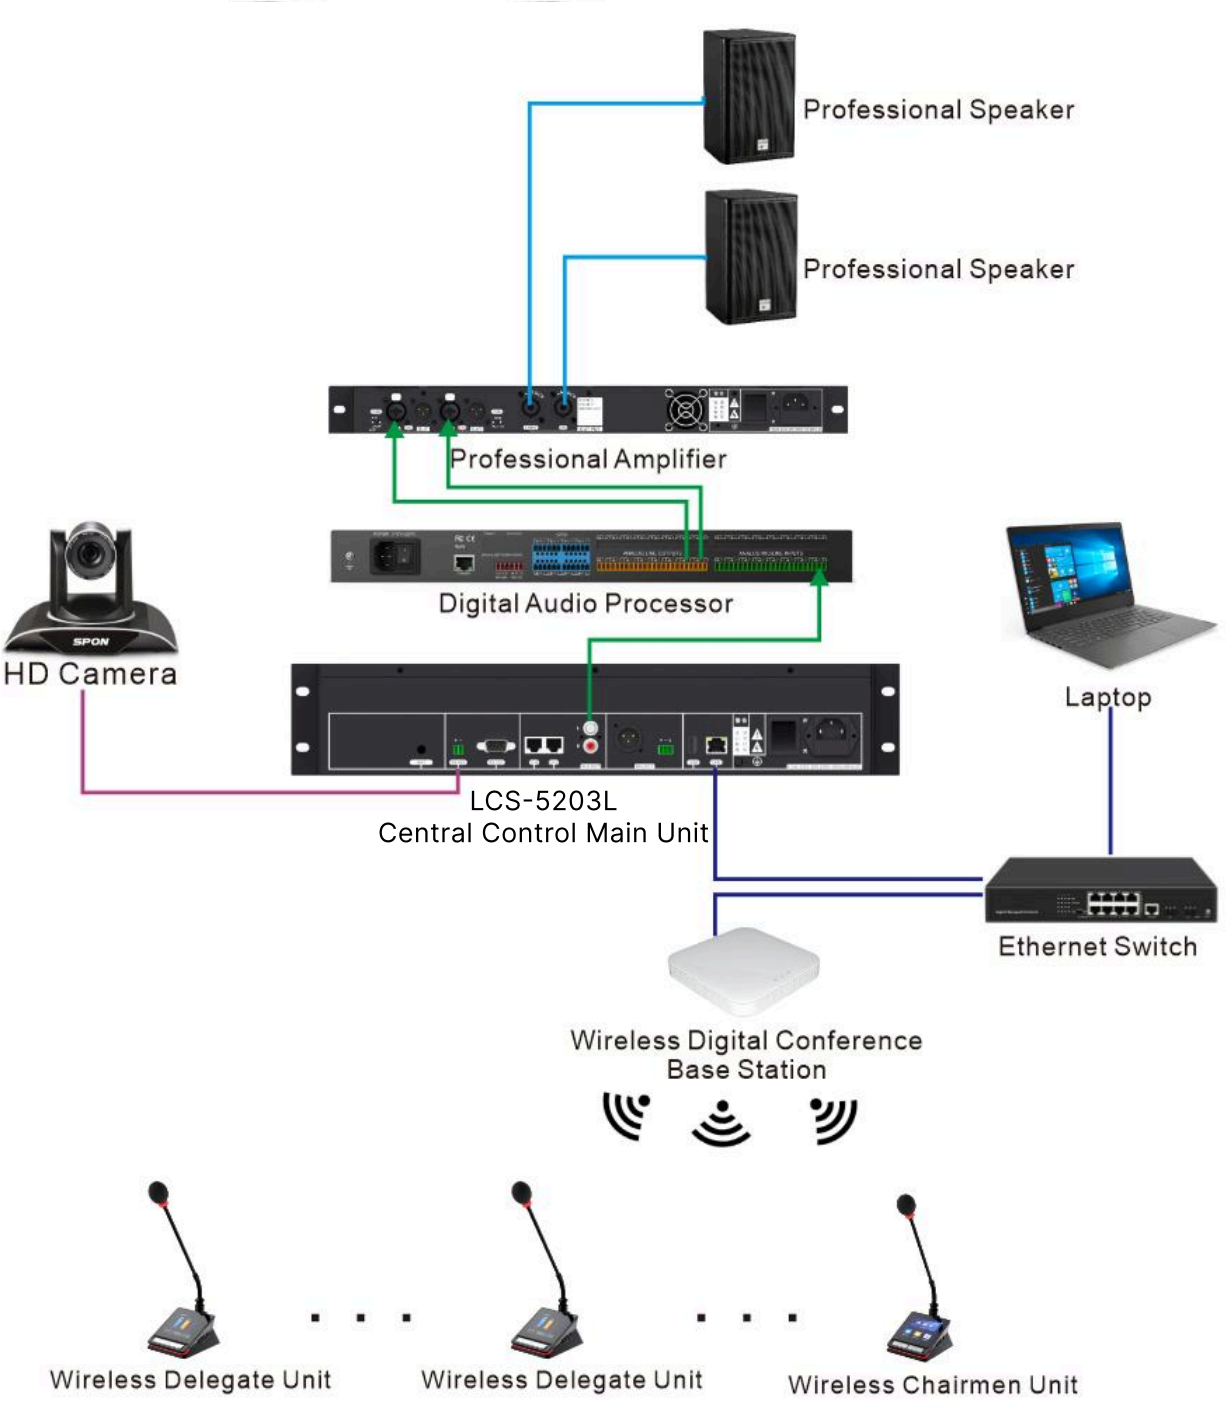

DIMENSIONAL DRAWING

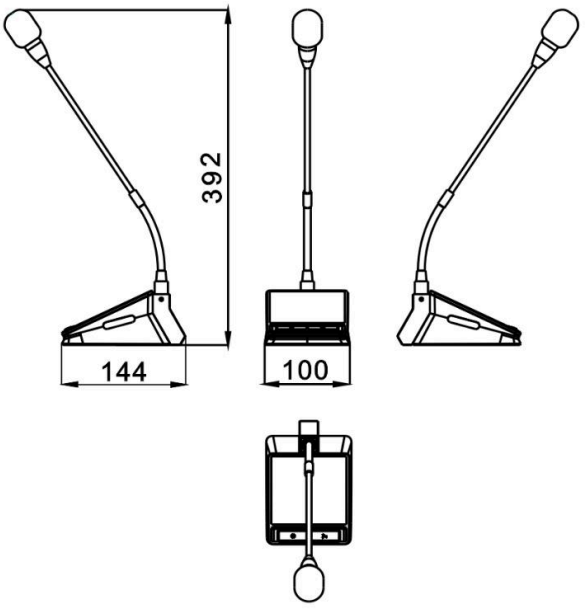

SPON SPON Communications Co., LTD

Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. **Mobile:** +86 138 7314 3517

Email: inquiry@sponcomm.com **Tel:** +86 731 8557 0190

www.sponcomm.com