

LCS-5302Z


Digital Conference System Charging Box

4 USB-A Ports | 8 Magnetic Ports | 120W Power

MAIN FEATURES

- There are 8 magnetic quick charging ports, providing a maximum output voltage of 13V (±0.5V) and a charging current of 1A (±0.3A).
- There are 4 USB regular charging ports, providing a maximum output voltage of 5V (±0.5V) and a charging current of 1A (±0.3A).

DIMENSIONAL DRAWING

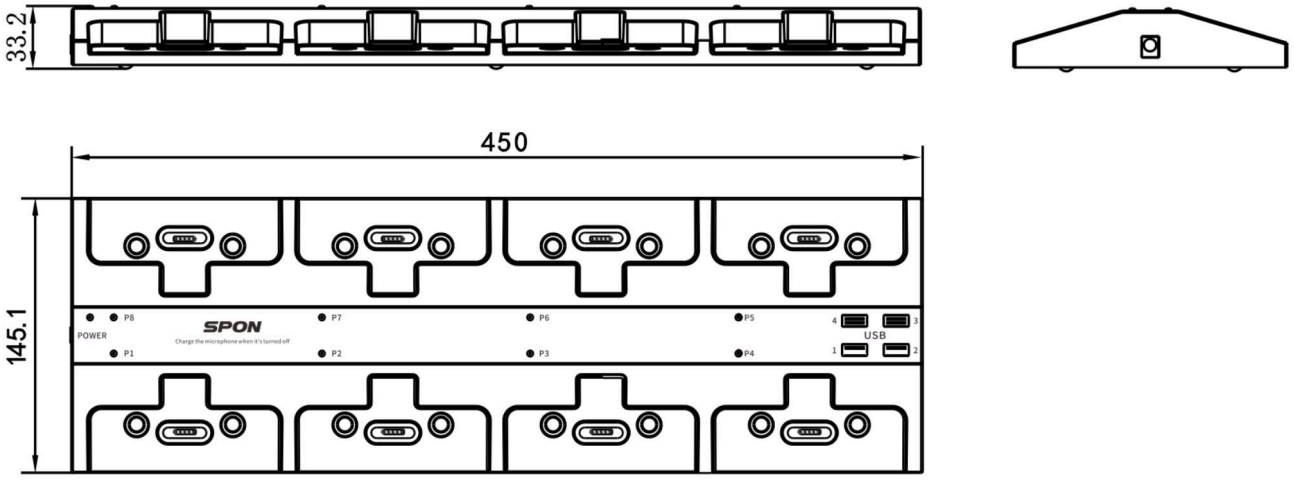

SPECIFICATION

POWER PARAMETERS

Power Supply:	DC24V/5A
Rated Output Power:	Total Output ≤120W; Magnetic Single Path≤12W; USB Single Path ≤5W
Standby Power Consumption:	＜3.5W

ACCESSORIES


- 1×Power Cord (3*1.0mm²/1.5m) (Optional)
- 1×Power Adaptor(DC24V/5A) (Optional)
- 4×Type-C USB Cable
- 1×Quick Installation Guide
- 1×Quality Certificate
- 1×Warranty Card

GENERAL PARAMETERS

Mounting Method:	Desktop
Installation Environment:	Dry Indoor Locations
Housing Color:	Black
Housing Material:	ABS
Working Condition:	0 °C ~+45°C
Working Humidity:	≤90%RH（No Condensation）
Product Dimensions:	450×145.1×33.2mm
Warranty:	2 Years


INTERFACE DESCRIPTION

[Rear Panel]

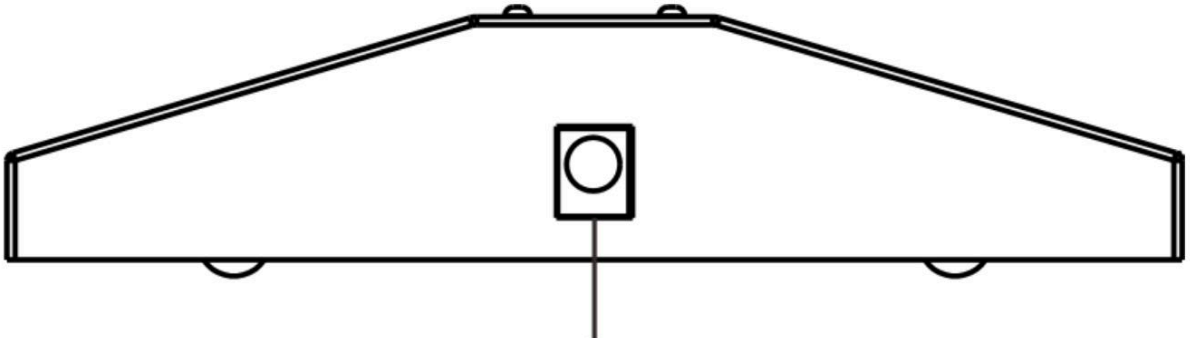

① **Power Input Interface:**
DC24V/5A Power Input.

[Front Panel]

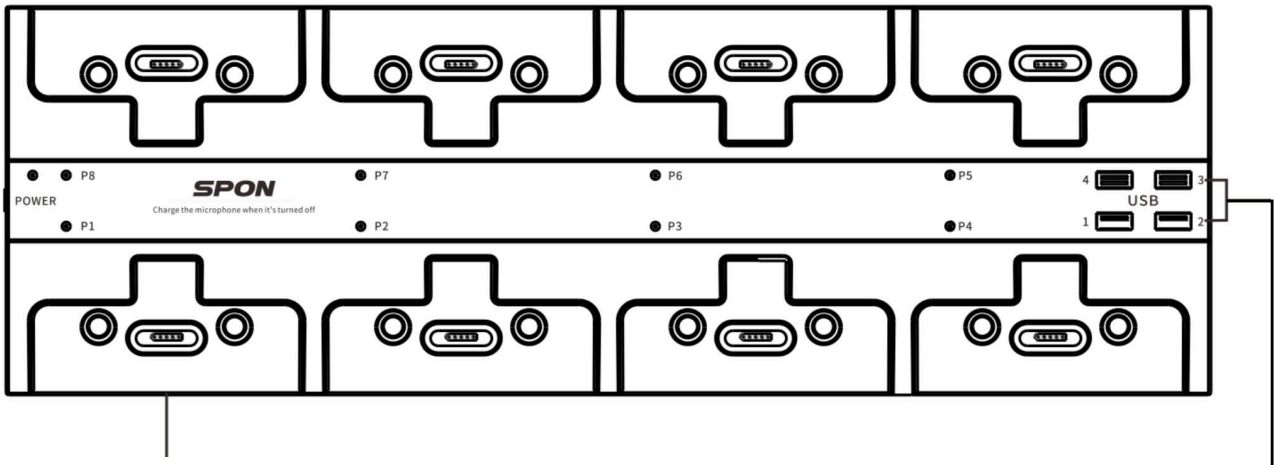

① **8-Way Magnetic Charging Interface:**
Put The Microphone Unit On It, And Charge The Microphone Unit Via Magnetic Connection.

② **4-Way USB Interface:**
5V/1A

SPON SPON Communications Co., LTD

Address: No.70, Nantang Road, High-Tech Zone, Changsha, China. **Mobile:** +86 138 7314 3517

Email: inquiry@sponcomm.com **Tel:** +86 731 8557 0190

www.sponcomm.com