




LCS-5303Z-L

48V Professional Conference Wired Microphone

The LCS-5303Z-L Microphone is a 48V Phantom power supply supercardioid condenser conference wired microphone

DIMENSIONAL DRAWING

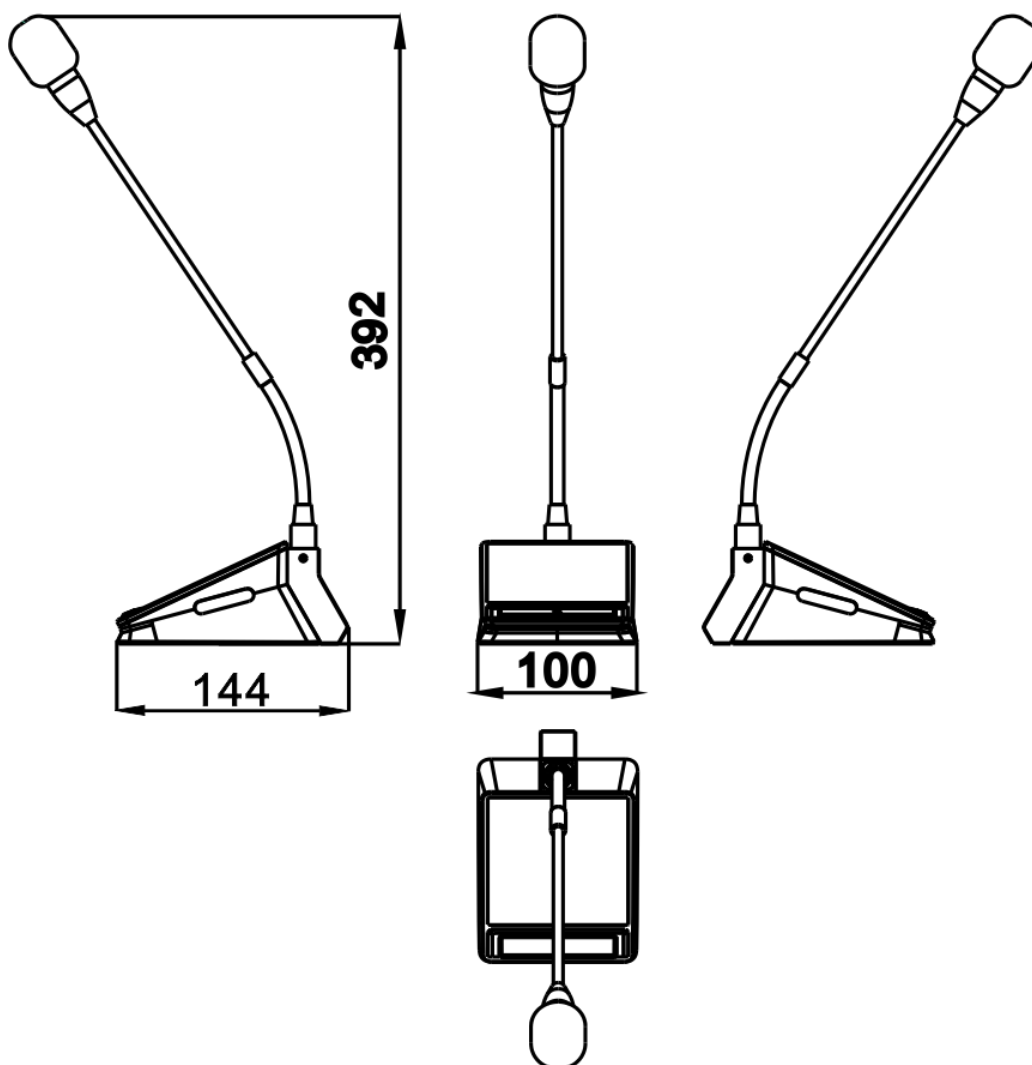

SPECIFICATION

POWER PARAMETERS

Power Supply:	Phantom power supply by the mixer
---------------	-----------------------------------

MECHANICAL & ENVIRONMENT PROPERTIES

Connection Method:	Standard XLR interface
--------------------	------------------------

Operating Temperature:	0-45℃
------------------------	-------

Operating Humidity:	≤90%(Non condensing)
---------------------	----------------------

Product Dimension:	114(W) × 100(H) × 392(D) mm
--------------------	-----------------------------

Shell Material:	ABS/Aluminium Alloy
-----------------	---------------------

Product Warranty:	2 Years
-------------------	---------

AUDIO PARAMETERS

SNR(Signal to noise ratio):	≥83dB
-----------------------------	-------

Frequency response:	40Hz-18KHz
---------------------	------------

Microphone:	1×14mm diameter gold-plated capacitive microphone
-------------	---

Directional property:	Supercardioid
-----------------------	---------------

ACCESSORIES


1×Microphone Pole

1×Waterproof Cotton Microphone Cover

1×Quick Installation Guide

1×Warranty & Certification Card

INTERFACE DESCRIPTION

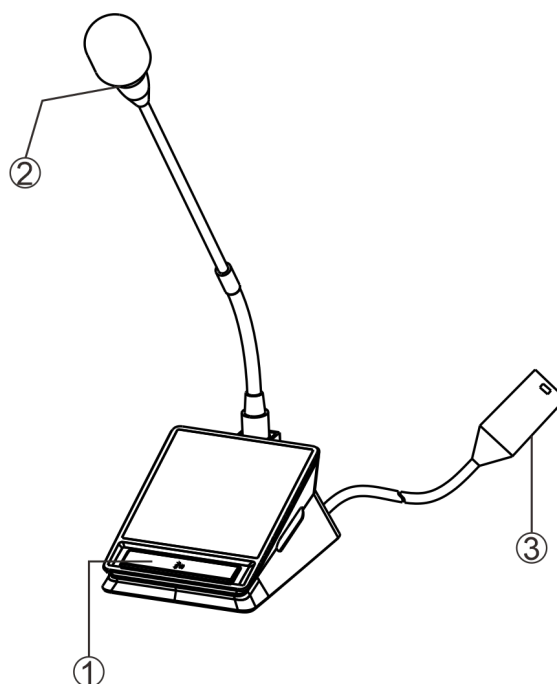


① Speak button

② Microphone pole status light

③ Carron interface(XLR): Requires phantom power supply, it is used for analog backup (For example: connecting to the mixer)

INSTALLATION STEPS

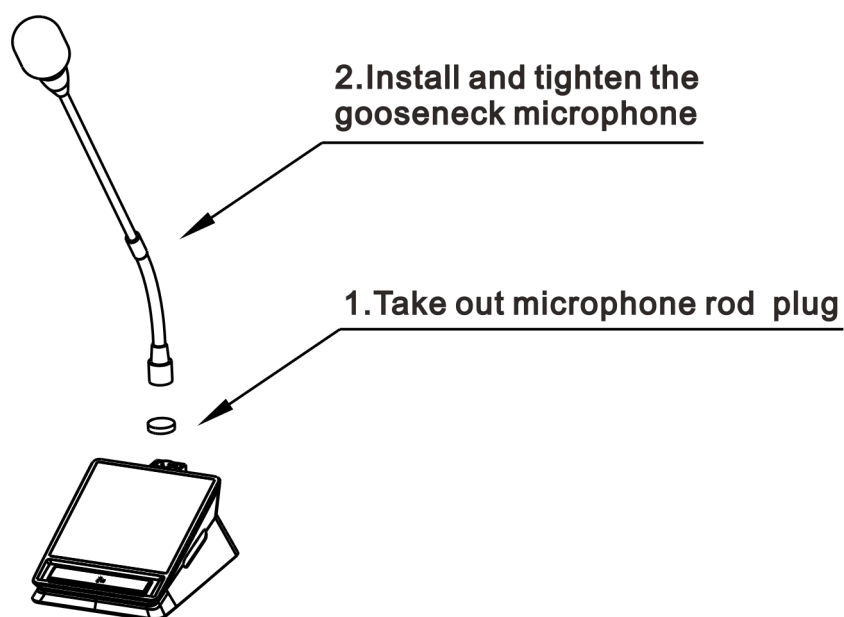

CONNECTION METHOD



LCS-5303Z-L
Wired Microphone



Mixer (With 48V Phantom Power)

