

NAC-522A

Analog Desktop Microphone

Touch Button | One-Key Broadcasting


MAIN FEATURES

1. High precision touch switch button design;

2. Rich expansion interface, support one 3.5mm audio output interface and one 6.5mm audio output interface;

3. Sound volume indicator prompt, reduce the maximum sound amplification distortion; 4.High-fidelity vocal restoration;

DIMENSION DRAWING

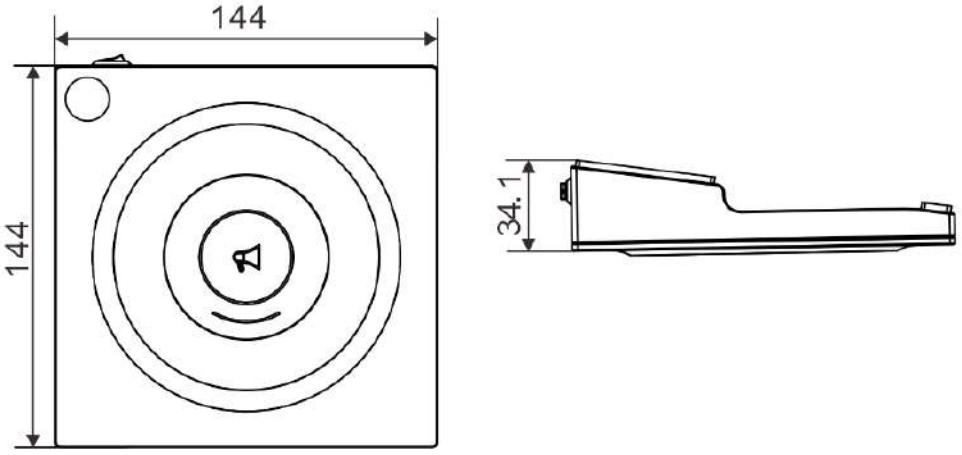

SPECIFICATION

POWER PARAMETERS

Power Supply	DC12V ,1.5A
Power Consumption	≤3W

MECHANICAL&ENVIRONMENT PROPERTIES

Mounting Method	Desktop
Installation Environment	Dry Indoor Locations Only
Housing Material	Surface-Treated Steel Plate
Color	Black
Operation Temperature	0-45°C
Product Dimensions	144×144×34.1mm
Product Warranty	2 Years Limited

AUDIO PARAMETERS

Mic Type	Condenser
Frequency Response	100HZ—16KHz
Directivity	Cardioid
SNR	80dB
Sampling Rate	8KHz

ACCESSORIES

1 × Power Adaptor (DC9V/1A)

1 × Rods(IM-380)

1 × 3.5mm Audio Cable(2.5M)

1 × Quick User Guide


1 × Certification

1 × Warranty Card

1 × Mic Cable

INTERFACE DESCRIPTION

[Front Panel]

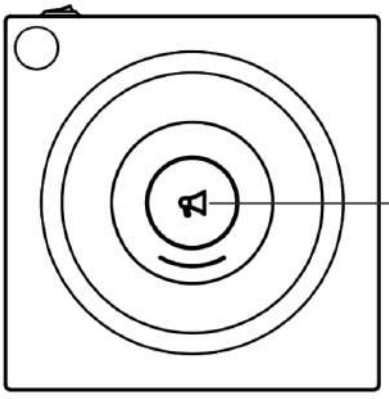


① Broadcast button: Used to initiate broadcast.

Status indicator: indicates the terminal status. The specific meanings are as follows:

- Steady red: Idle;
- Steady green: Broadcasting

[Rear Panel]

④ Audio Output interface:
Connect 3.5mm audio cable.

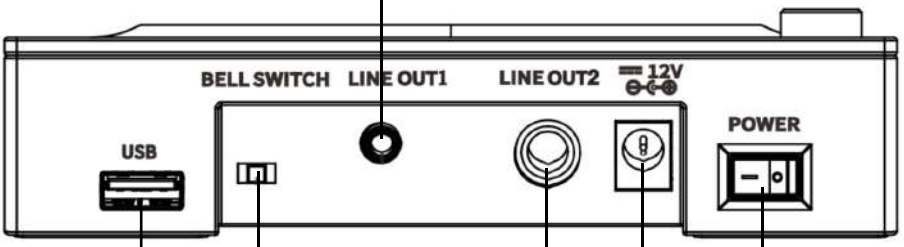

⑥ USB port:
Reserved

① Power Switch:
Press "O" to turn off the power, press "-" to turn on the power.

⑤ Prompt Tone Switch:
Set whether to enable broadcast prompt tone.


② Power Input interface:
Connect DC12V/1.5A power supply.

③ Audio Output interface:
Connect 6.5mm audio cable.

APPLICATIONS

Application 1

The Analog Desktop Microphone NAC-522A can be connected to pre-amplifier ,user can make real-time announcement on NAC-522A to designated terminal or zones.

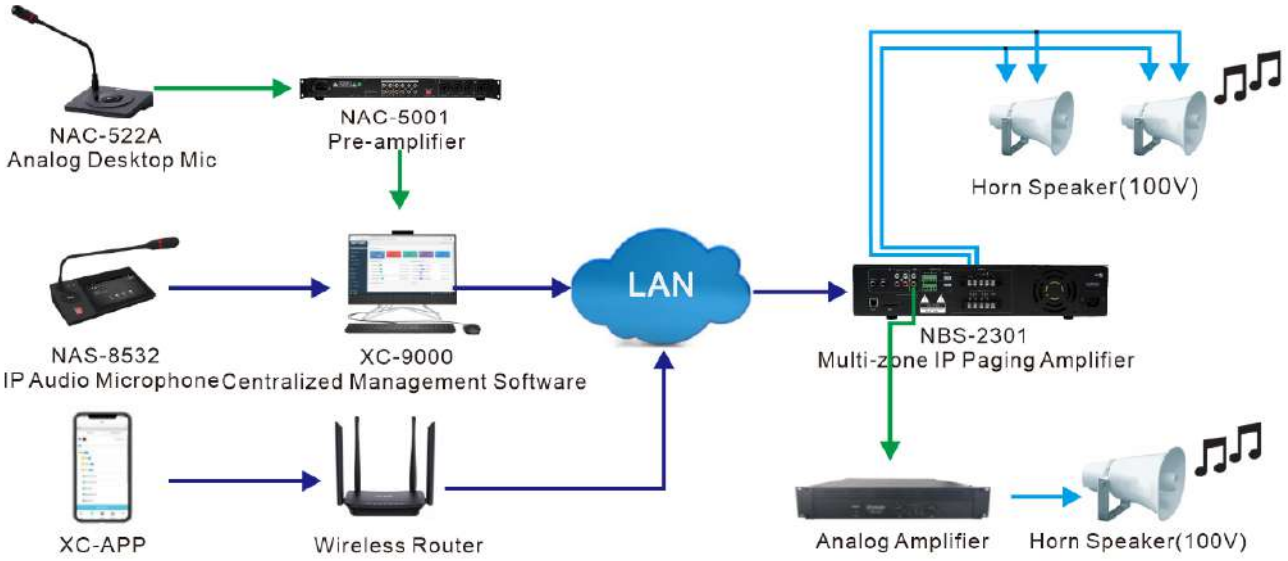

Application 2

The Analog Desktop Microphone NAC-522A can directly connect to IP amplifier for local sound amplification.

