

NAC-531

Array Loudspeaker

The NAC-531 is a full-range line array speaker with a minimalist design. It delivers rich midrange, high-fidelity sound reproduction, and excellent speech clarity, making it widely used in high-end conference halls, large banquets, and similar venues.


Clear Sound Quality

IP55

SPECIFICATION


Frequency Response	150-20KHz±10%
Sensitivity	89B±3dB(1m/1w)
Rated Power	60W(4Ω)
Power Taps	7.5W/15W/30W(100V)
Line input	100V
Coverage Angle	120° (H) × 50° (V)
Material	Aluminium
Component	2"*4
Finished Colour	White/Black
IP Rating	IP55
Weight	1.6kg
Dimension(mm)	430*84*68.5
Operatiing Temperature	-25°C~+55°C
Warranty	2 Years

CIRCUIT DIAGRAM

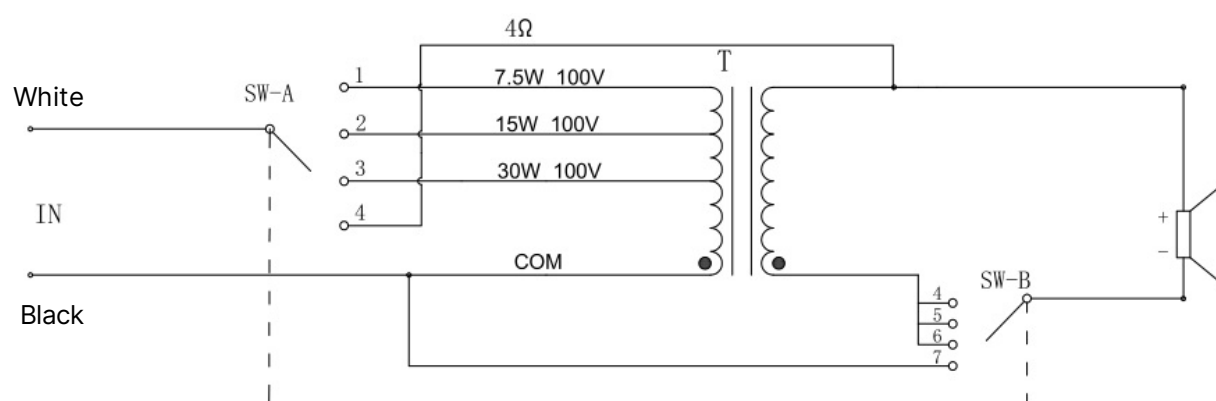

INSTALLATION


unit: mm

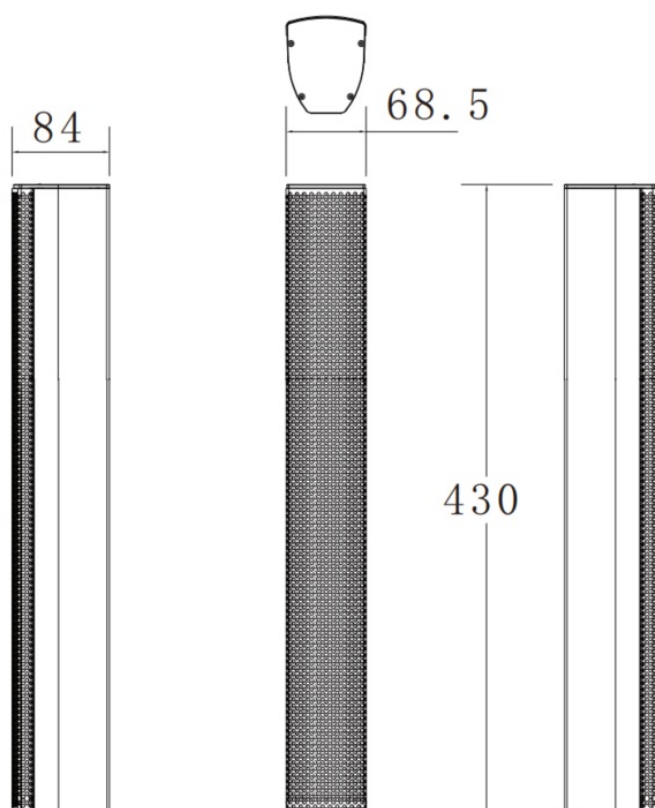

INSTALLATION

Step 1


- Use a $\Phi 6$ drill bit to drill four expansion screw holes on the wall with a spacing of 70×57mm and a depth of 35mm.

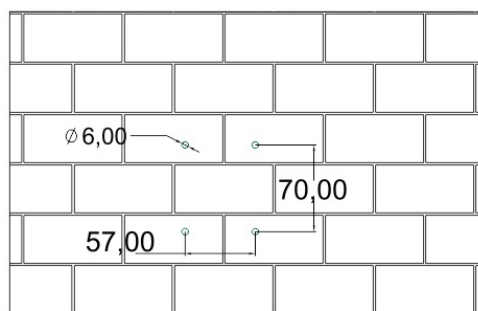

Step 2

- Use a hammer to drive the square expansion tubes into the wall.


Use a hammer to drive the four square expansion tubes into the wall.

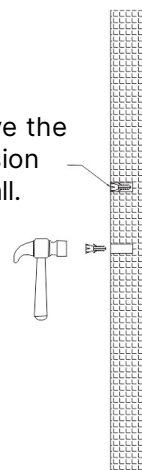

Step 3


- Use 4 pieces of 4*25mm countersunk self-tapping screws to lock the bracket onto the wall.

4*25mm
countersunk self
tapping screws

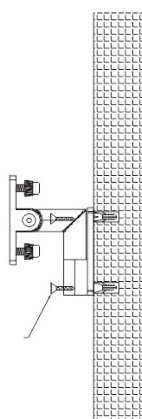

Step 4

- Align the slot on the upper part of the sound column with the bracket card. Push the sound column upward to a proper position, and then use a flathead screwdriver to tighten the screw on the bracket.

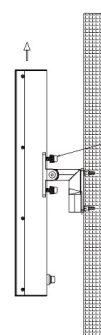

After pushing the sound column to the appropriate position, use a flathead screwdriver to tighten the screw on the bracket.

