



SAP-L208

Dual 8-inch Line Array Full-Range Speaker

LF: 2x8" HF: 1x3"

99dB Sensitivity

Versatile Applications

Comfortable Tonal Quality

MAIN FEATURES

▲ Audio Performance

- Specialized Speaker Unit: Efficiently designed for rich sound pressure and comfortable audio quality.
- Clear Sound: Delivers clear audio with exceptional spatial perception and texture.


▲ Design And Materials

- Quality Construction: Durable enclosure crafted from high-quality plywood.
- Protective Features: Incorporates high-strength steel mesh with waterproof, dustproof, and acoustically transparent sponge. (Weatherproof protection might be various depending on model)

▲ Versatile Applications

- Suitable Occasions: Ideal for various venues such as outdoor performances, stadiums, and theaters; Clubs, multi-purpose halls, performance venues, and auditoriums.

DIMENSION DRAWING

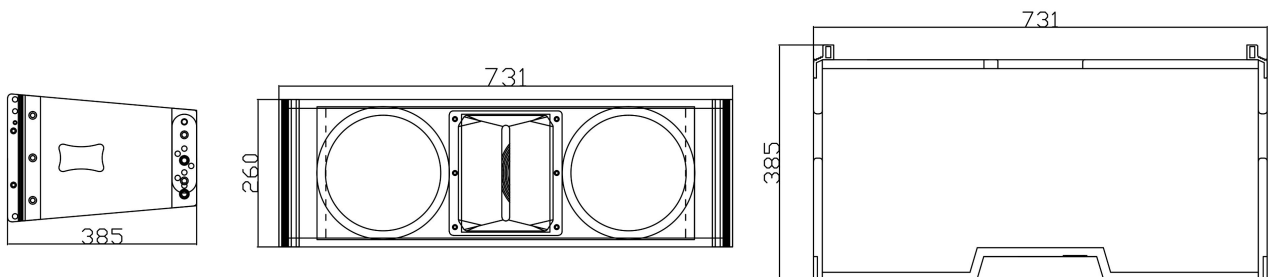

SPECIFICATION

POWER PARAMETERS

Rated Power Output:	500W
Max Power Output:	2000W
Rated Impedance:	8Ω

AUDIO PARAMETERS

Speaker Component:	LF: 2×8(52mm Voice Coil) HF: 1×3" (44mm Voice Coil)
Frequency Response:	100Hz-17.5kHz
Sensitivity:	99dB
Max.SPL:	132dB
Connector:	2×Speakon NL4MP(1+, 1-)


MECHANICAL&ENVIRONMENT PROPERTIES

Mounting Method:	Hanging, Floor Installation
Installation Environment:	Indoor, Outdoor Locations
Operatiing Temperature:	0°C~+55°C
Operating Humidity:	< 95%
Cabinet Material:	High-Density Premium Birch Plywood
Surface Coating:	Silicon Carbide Coating
Product Dimensions:	260×731×385 (mm)
Product Weight:	21.45kg
Product Warranty:	2 Years


ACCESSORIES

1×Line Array Full-Range Speaker
2×Speakon NL4MP
1×Quick Installation Guide
1×Quality Certificate & Warranty Card


SPEAKER DIAGRAM

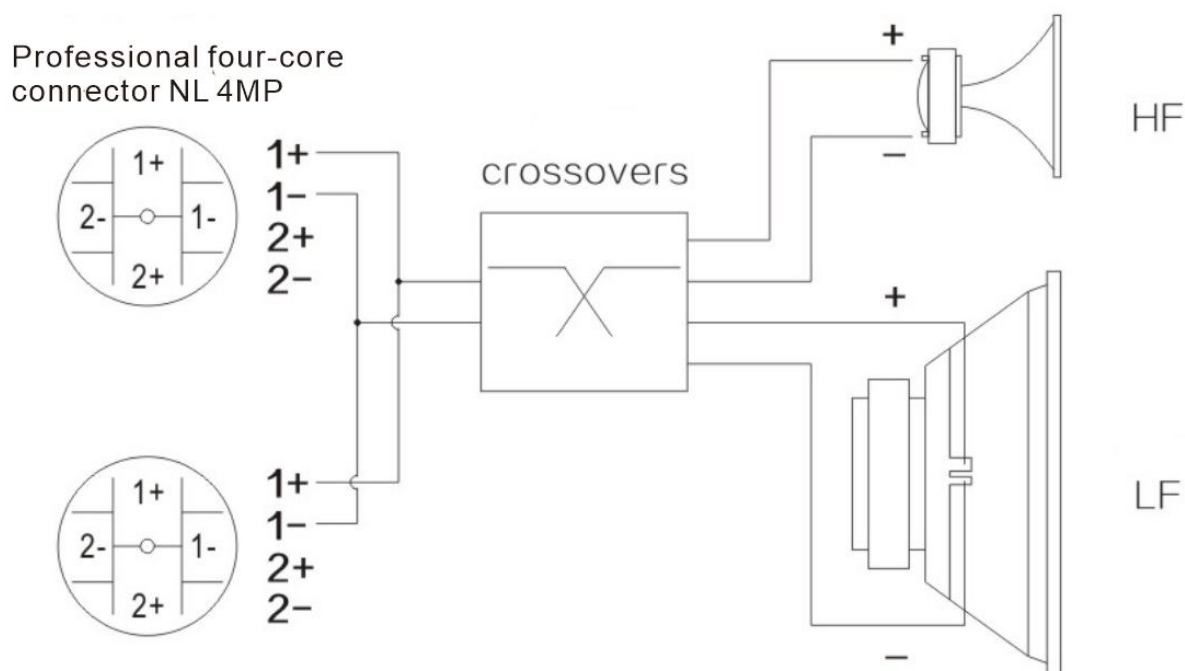


CONNECTION DIAGRAM

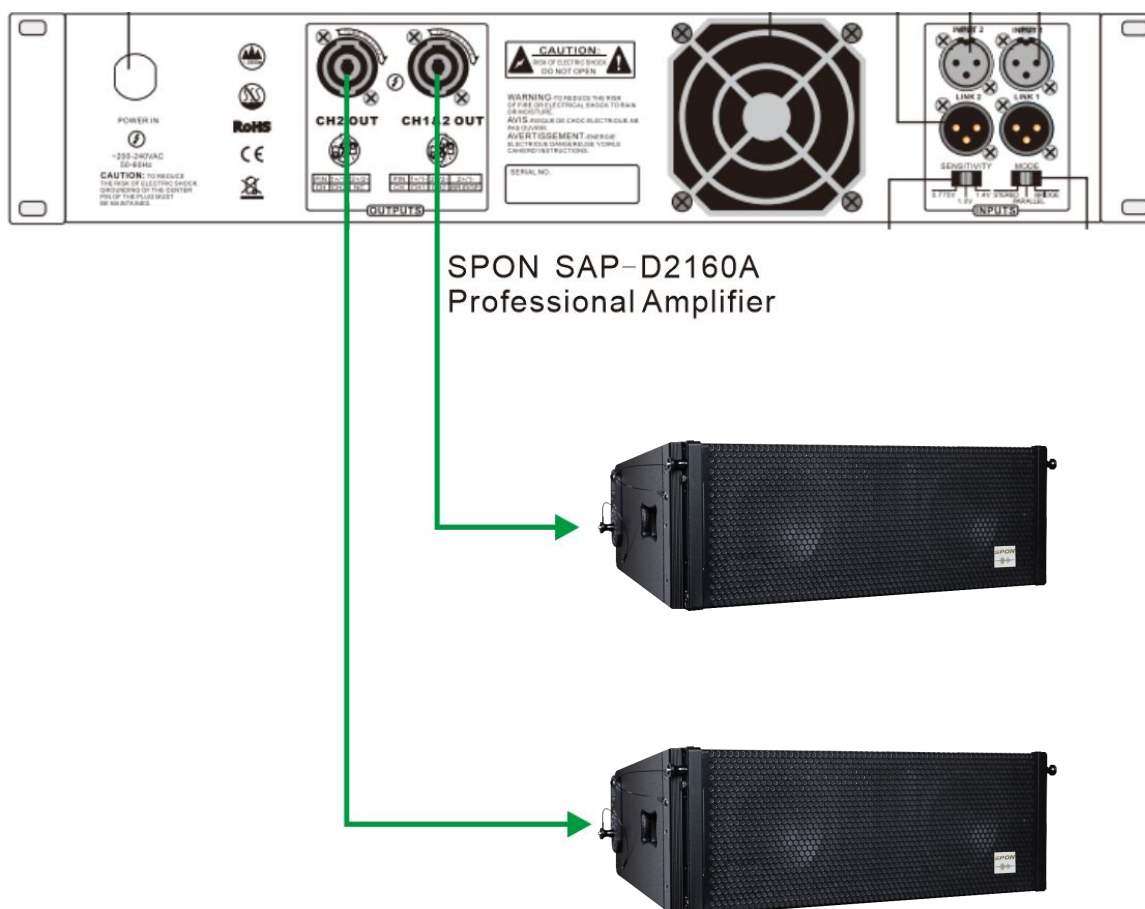

INSTALLATION METHOD

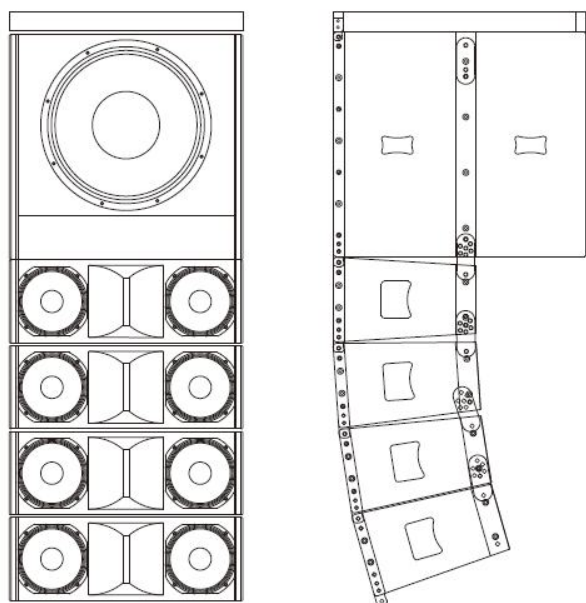

Hanging Installation

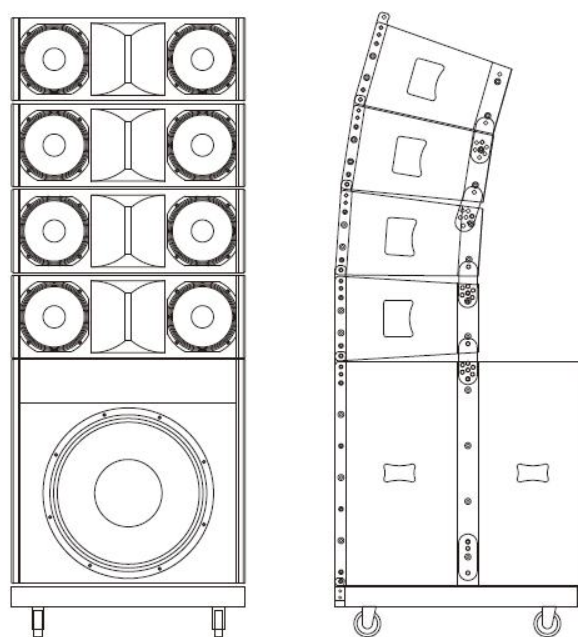

Floor Installation

