



SAP-L210B

Dual 10-inch Line Array Full-Range Speaker

LF: 2x10" HF: 1x3"

99dB Sensitivity

Versatile Applications

Comfortable Tonal Quality

MAIN FEATURES

▲ Audio Performance

- Specialized Speaker Unit: Efficiently designed for rich sound pressure and comfortable audio quality.
- Clear Sound: Delivers clear audio with exceptional spatial perception and texture.


▲ Design And Materials

- Quality Construction: Durable enclosure crafted from high-quality plywood.
- Protective Features: Incorporates high-strength steel mesh with waterproof, dustproof, and acoustically transparent sponge. (Weatherproof protection might be various depending on model)

▲ Versatile Applications

- Suitable Occasions: Ideal for various venues such as outdoor performances, stadiums, and theaters; Clubs, multi-purpose halls, performance venues, and auditoriums.

DIMENSION DRAWING

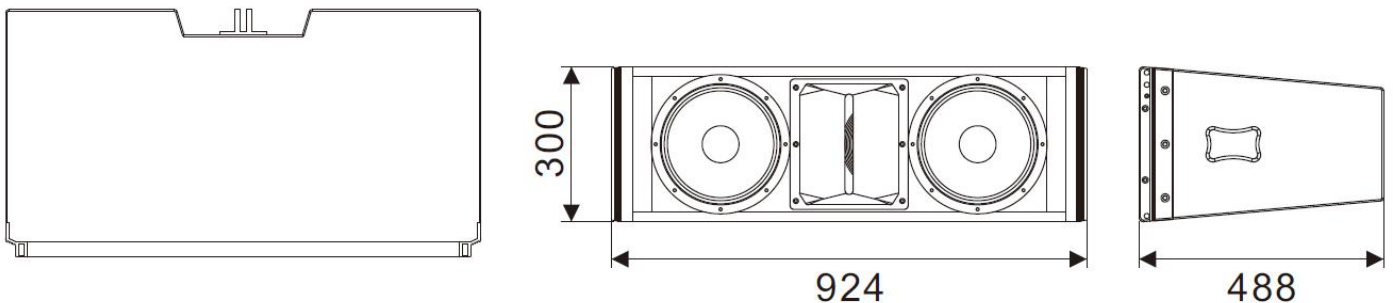

SPECIFICATION

POWER PARAMETERS

Rated Power Output:	600W
Max Power Output:	2400W
Rated Impedance:	8Ω

AUDIO PARAMETERS

Speaker Component:	LF: 2×10(99.3mm Voice Coil) HF: 1×3" (75mm Voice Coil)
Frequency Response:	60Hz-20kHz
Sensitivity:	101dB
Max.SPL:	135dB
Connector:	2×Speakon NL4MP(1+, 1-)

MECHANICAL&ENVIRONMENT PROPERTIES


Mounting Method:	Hanging, Floor Installation
Installation Environment:	Indoor, Outdoor Locations
Operatiing Temperature:	0°C~+55°C
Operating Humidity:	< 95%
Cabinet Material:	High-Density Premium Birch Plywood
Surface Coating:	Silicon Carbide Coating
Product Dimensions:	300×924×488 (mm)
Product Weight:	34.20kg
Product Warranty:	2 Years

ACCESSORIES

1×Line Array Full-Range Speaker
2×Speakon NL4MP
1×Quick Installation Guide
1×Quality Certificate & Warranty Card

SPEAKER DIAGRAM

Professional four-core
connector NL 4MP

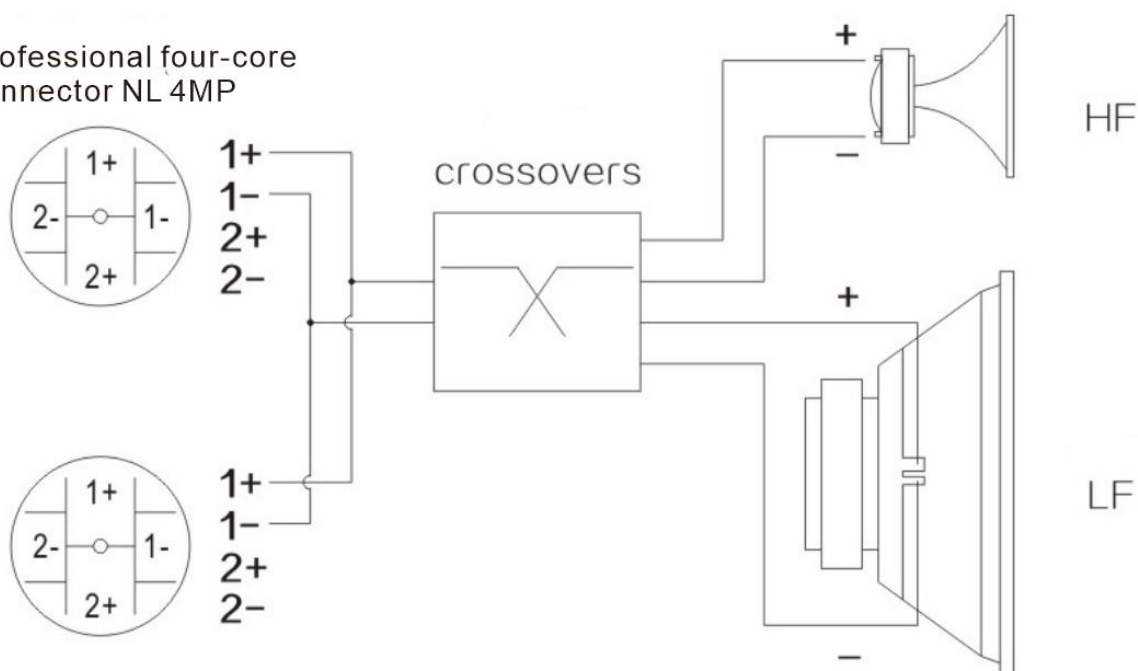


CONNECTION DIAGRAM




SPON SAP-D2160A
Professional Amplifier

INSTALLATION METHOD

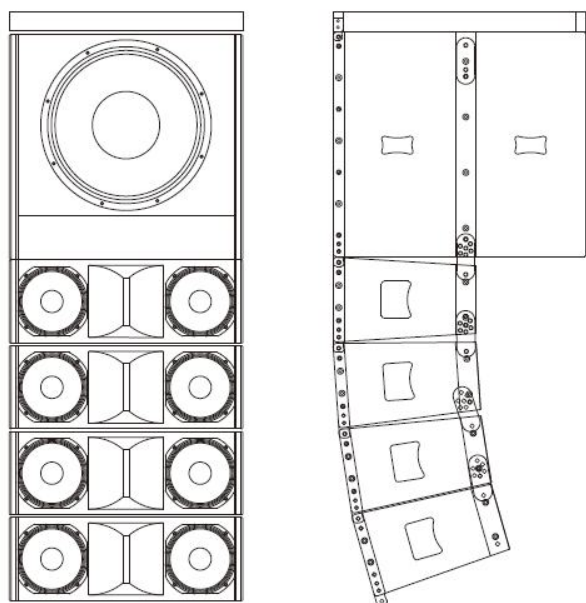

Hanging Installation

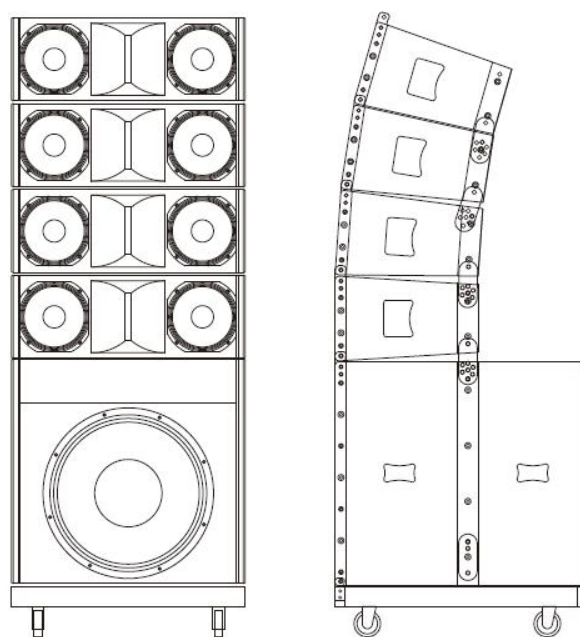

Floor Installation

